


- TIGHT TOLERANCE & STABILITY, RoHS COMPLIANT DESIGN
- APPLICATION: ADSL, NETWORK CARD, A/V CARD, NETWORK PROCESSOR, ISDN

Specification

Parameter	Characteristic
Frequency Range	3.5MHz ~ 80.000MHz
Oscillation Mode	Fundamental / Third overtone
Holder type	HC49/SM, HC49/SSM
Frequency Tolerance (@ 25 °C)	(See Table 5)
Frequency Stability (Ref. @ 25 °C)	(See Table 6)
Equivalent Series Resistance (C.I)	(See Table 8)
Operating Temperature Range	-10 ~ +70 °C standard / -40 ~ +85 °C available
Storage Temperature Range	-40 ~ +90 °C
Shunt Capacitance(Co)	7pF max
Load Capacitance(CL)	18pF standard (See Table 3)
Drive Level	10 μ W (1000 μ Wmax)
Aging(at 25 °C)	\pm 5ppm / year max

Drawing

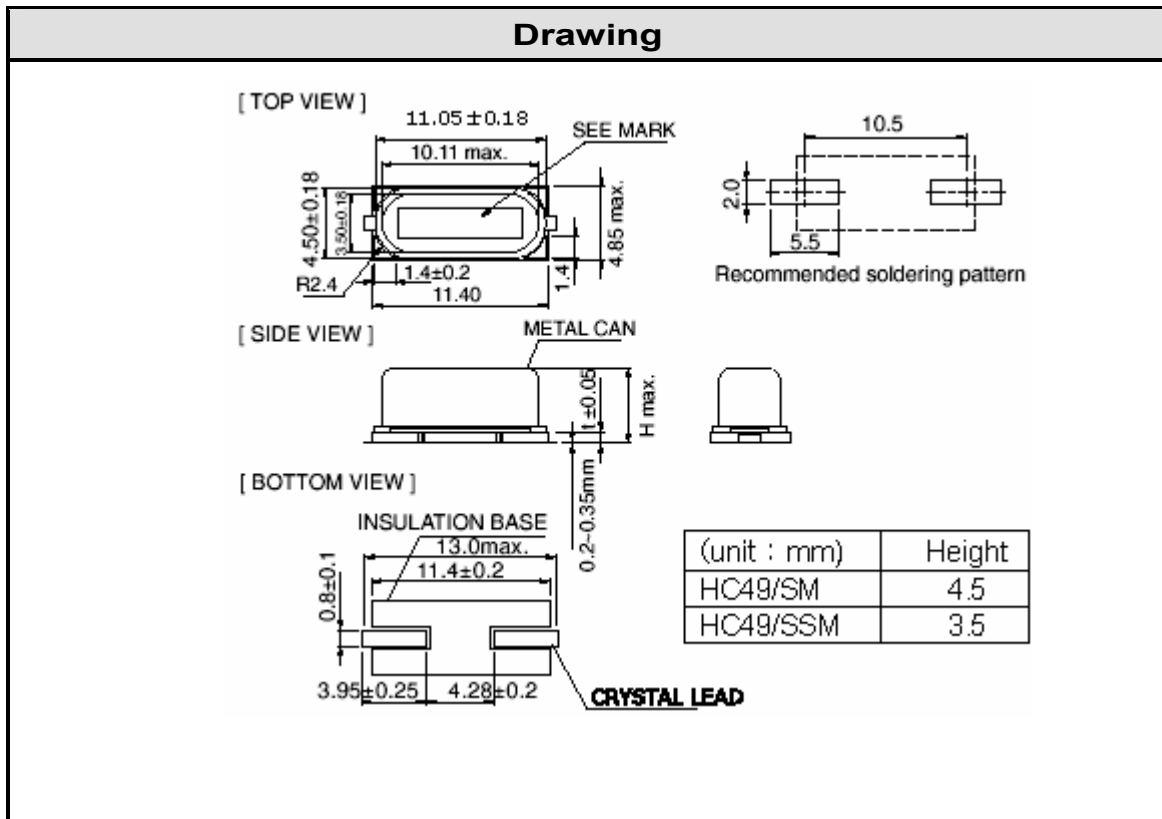

4TechWorld Co., Ltd

B-408, Kajwa Industrial Complex. #178-78, Kajwa-1dong, Seo-ku, Incheon-city, 404-812, Korea

◆ Tel:+82-32-584-6517~8 ◆ Fax:+82-32-584-6516 ◆ Web site:www.4tech.biz

