


- TIGHT TOLERANCE & STABILITY, RoHS COMPLIANT DESIGN
- APPLICATION: ADSL, NETWORK CARD, A/V CARD, NETWORK PROCESSOR, ISDN

Specification

Parameter	Characteristic
Frequency Range	3.5MHz ~ 160.000MHz
Oscillation Mode	Fundamental / Third overtone / Fifth overtone
Holder type	UM-1, UM-5
Frequency Tolerance (@ 25℃)	(See Table 5)
Frequency Stability (Ref. @ 25℃)	(See Table 6)
Equivalent Series Resistance (C.I)	(See Table 8)
Operating Temperature Range	-10 ~ +70℃ standard / -40 ~ +85℃ available
Storage Temperature Range	-40 ~ +90℃
Shunt Capacitance(Co)	7pF max
Load Capacitance(CL)	18pF standard (See Table 3)
Drive Level	10 μ W (1000 μ Wmax)
Aging(at 25℃)	\pm 5ppm / year max

Drawing

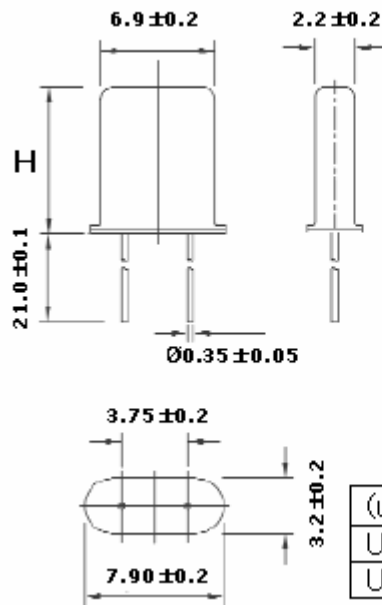

4TechWorld Co., Ltd

B-408, Kajwa Industrial Complex. #178-78, Kajwa-1dong, Seo-ku, Incheon-city, 404-812, Korea
 ♦ Tel:+82-32-584-6517~8 ♦ Fax:+82-32-584-6516 ♦ Web site:www.4tech.biz

Ordering Guide

Typical P/N : UM-1 - 61.44M - 18 - 1 10 10 R - 50 - B

1
2
3
4
5
6
7
8
9

1. Package

UM-1 = 7.9x3.2x8.2mm

UM-5 = 7.9x3.2x5.8mm

[\(UM-1 & UM-5 Crystal Unit\)](#)

2. Frequency range : 3.5 to 160MHz

UM-1 = 3.5 to 160MHz

UM-5 = 9.6 to 160MHz

3.5MHz to 50MHz : Fundamental

Re: 61.44MHz Fundamental Avail. (Special)

30MHz to 100MHz : Third overtone

75MHz to 160MHz : Fifth overtone

3. Load capacitance

S : Series

10 : 10pF

18 : 18pF

20 : 20pF

30 : 30pF

4. Oscillation Mode

1 : Fundamental

3 : 3rd Overtone

5 : 5th Overtone

5. Tolerance Options (Room Temperature)

50 : +/- 50ppm

30 : +/- 30ppm

15 : +/- 15ppm

10 : +/- 10ppm

6. Stability Options (Temperature Range)

50 : +/- 50ppm

30 : +/- 30ppm

15 : +/- 15ppm

10 : +/- 10ppm

7. Operating temperature range

P : 0~60°C

Q : -10~70°C

R : -30~75°C

S : -40~85°C

* : The others

8. Equivalent Series Resistance (C.I)

Fund	ERS		3 O/T	ERS	
	UM-1	UM-5		UM-1	UM-5
3.5 to 3.99	200	-	30.0 to 49.99	45	50
4.0 to 4.99	150	-	50.0 to 100.0	50	60
5.0 to 9.99	60	-	5 O/T	ERS	
10.0 to 14.99	35	45		UM-1	UM-5
15.0 to 50.0	25	35		80	90

9. Packing

TR : Tape and Reel

B : Bulk