


Features

- LVDS, Extended Temperature available
- Ceramic SMD Package, Seam sealed, 7x5x1.8mm
- 2.5V / 3.3V Operation
- RoHS Compliant

Specification

Parameter	Characteristic
Frequency Range	1.000MHz ~ 800.0000MHz
Frequency Stability	+/- 50 ppm std. (See Table 4) Inclusive of operating temperature
Operating Temperature Range	0 ~ 70°C std. (See Table 5)
Storage Temperature Range	-55 ~ +125°C
Input Voltage	3.3Vdc +/- 5% std.
Input Current	80mA max
Output 0 Level (Vol)	Vcc-2.175Vdc max
Output 1 Level (Voh)	Vcc-1.925Vdc min
Symmetry (Duty Cycle)	40/60% @ 50% of waveform std. (See Table 6)
Rise & Fall Time	0.6nS typical, 1.0nS max
Start up time	10mS max
Output Load	50Ω Differential Load
Tri-state Output (Pin# 1)	High or Open : Oscillation, Low : High Impedance
Aging	+/- 3 ppm max / year
Phase Jitter (12KHz~20MHz)	1pS RMS max (See Table A)

Drawing

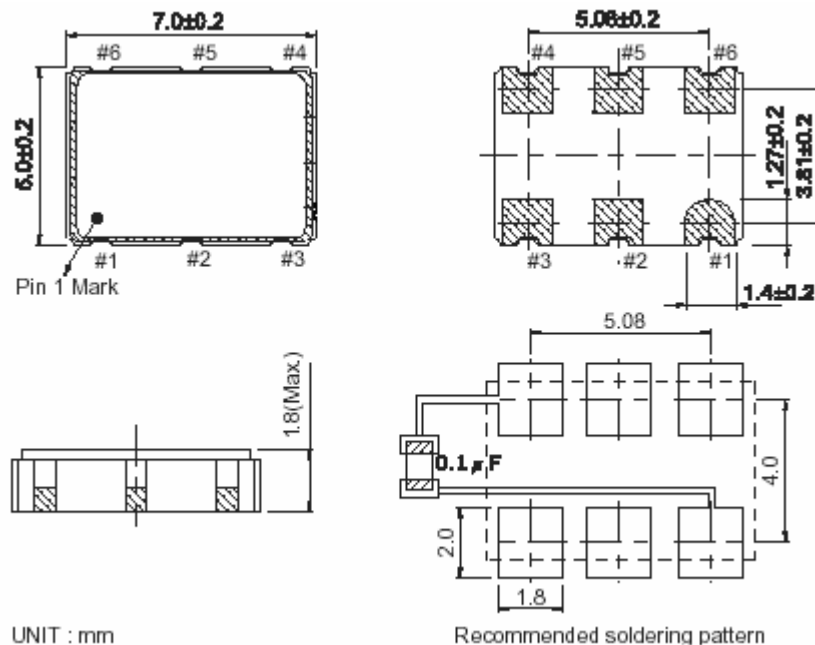

Pin Connection

1. E/D or N/C
2. N/C or E/D
3. Ground
4. Output
5. Comp. Output
6. Vcc

Ordering Guide

Typical P/N : C57XL - 106.25M - 3 - 50 A S1 T1 -TR

1 2 3 4 5 6 7 8

- 1. Package** C57XL = 7x5x1.8mm
(7x5mm Ceramic LVDS SMD Oscillator)
- 2. Frequency range** : 1 to 800MHz
- 3. Input Voltage** : 2 = 2.5V / 3 = 3.3V
- 4. Frequency Stability**
- 00 : +/- 100ppm
 - 50 : +/- 50ppm
 - 25 : +/- 25ppm

- 5. Operating Temperature Range**
- A : 0~70°C
 - B : -20~70°C
 - C : -40~85°C
 - D : -10~70°C
 - * : The others

- 6. Symmetry (Duty Cycle)**
- S1 : 45/55% at 50% of waveform
 - S2 : 40/60% at 50% of waveform

- 7. Pin#1 & Pin#2 Connection**
- T1 : Pin#1 E/D, Pin#2 N/C Standard
 - T2 : Pin#1 N/C, Pin#2 E/D

- 8. Packing**
- TR : Tape and Reel
 - BU : Bulk
 - TU : Tube

- A. Phase Jitter**
- 1MHz ≤ F < 9.7MHz : 3pS RMS max
 - 9.7MHz ≤ F ≤ 200MHz : 1pS RMS max
 - 200.001MHz < F ≤ 800MHz : 3pS RMS max
(12KHz ~ 20MHz)