





Features

- HCMOS/TTL
- Ceramic SMD Package, Seam sealed, 7x5x1.8mm, 6pads
- 3.3V / 5.0V Operation
- RoHS Compliant

Specification

Parameter	Characteristic
Frequency Range	1.000MHz ~ 200.0000MHz
Frequency Stability	+/- 100ppm std. (See Table 4) Inclusive of Operating Temperature
Operating Temperature Range	0 ~ +70°C std. (See Table 6)
Storage Temperature Range	-55 ~ +125°C
Input Voltage	3.3Vdc +/- 10% std. (See Table 3)
Control Voltage	1.65V +/- 1.35V std. (See Table 3)
Pulling Range	+/- 100ppm min std. (See Table 5)
Input Current	55mA max (See Table A)
Output 0 Level (Vol)	10%Vdc max
Output 1 Level (Voh)	90%Vdc min
Symmetry (Duty Cycle)	40/60% @ 1/2Vdc std. (See Table 7)
Rise & Fall Time	10nS max (See Table B)
Linearity	+/- 10% std. (+/- 15%, +/- 20%)
Start Up Time	10mS max
Output waveform vs. Load	HCMOS-TTL / 15pF or 10TTL
Aging(at 25°C)	+/- 5ppm / year max

Drawing

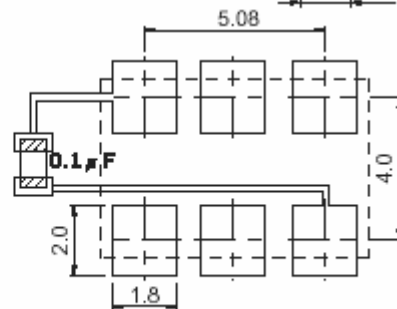

UNIT : mm

Recommended soldering pattern

Pin Connection

1. Vcontrol
2. E/D or N/C
3. Ground
4. Output
5. N/C or E/D
6. Vcc

Ordering Guide

Typical P/N : C57VH6 - 65.536M - 32 - 50 E B S1 T1 -TR

1
2
3
4
5
6
7
8
9

- 1. Package** C57VH6 = 7x5x1.8mm 6pads
(7x5mm Ceramic SMD VCXO 6pads type, HCMOS)
- 2. Frequency range** : 1 to 80MHz (Fundamental)
80.001 to 200MHz (Multi)

- 3. Input Voltage & Control Voltage :**
- 31 : 3.3V (Vcontrol : 1.65 +/- 1.35V)
 - 32 : 3.3V (Vcontrol : 1.65 +/- 1.50V)
 - 33 : 3.3V (Vcontrol : 1.65 +/- 1.65V)
 - 51 : 5.0V (Vcontrol : 2.50 +/- 2.00V)
 - 52 : 5.0V (Vcontrol : 2.50 +/- 2.50V)

- 4. Frequency Stability**
- 00 : +/- 100ppm
 - 50 : +/- 50ppm
 - 25 : +/- 25ppm

- 5. Pulling Range**
- C : +/- 50ppm min
 - D : +/- 80ppm min
 - E : +/- 100ppm min
 - F : +/- 130ppm min
 - * : The others

- 6. Operating Temperature Range**
- A : 0~70°C, B : -20~70°C, C : -40~85°C
 - D : -10~70°C, * : The other

- 7. Symmetry (Duty Cycle)**
- S1 : 45/55% at 1/2Vdc
 - S2 : 40/60% at 1/2Vdc

- 8. Pin#2 & Pin#5 Connection**
- T1 : Pin#2 E/D, Pin#5 N/C Standard
 - T2 : Pin#2 N/C, Pin#2 E/D
 - T3 : Pin#2 E/D, Pin#5 E/D
 - T4 : Pin#2 N/C, Pin#5 N/C

- 9. Packing**
- TR : Tape and Reel
 - BU : Bulk
 - TU : Tube

A. Input Current

(unit : mA)	5.0V	3.3V
1MHz to 20MHz	20	15
20.001MHz to 40MHz	30	25
40.001MHz to 80MHz	40	35
80.001MHz to 200MHz	55	55

- B. Rise / Fall Time**
- 1MHz ≤ F ≤ 20MHz : 10nS max
 - 20MHz < F ≤ 40MHz : 8nS max
 - 40MHz < F ≤ 80MHz : 5nS max
 - 80MHz < F ≤ 200MHz : 10nS max (Multi)